

剪线机配件说明

MAE. ANNEMATE
SSP400 / SSP401.



有您的支持，我们一定会做的更好
我们一直在创新，专注剪线机系列

- 工作效率高，比手工剪线效率高2倍以上
- 剪线质量好，剪线切口在0.1mm以下
- 智能电路控制，自动供线，保证刀片锋利
- 可调节风力大小，不会损伤产品
- 最新科技，结构紧凑，操作简便




刀头支架
型号029



行程线三插头

型号031

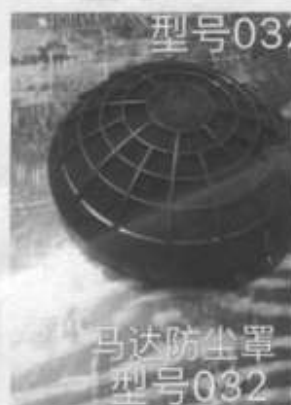

马达防尘罩
型号032



快持6-4
型号028



行程线三插头
型号030



型号010
回流阀



型号011
电磁阀



调风器
型号012



行程开关
型号013




风管
型号014



油泵
型号015



变压器
型号016

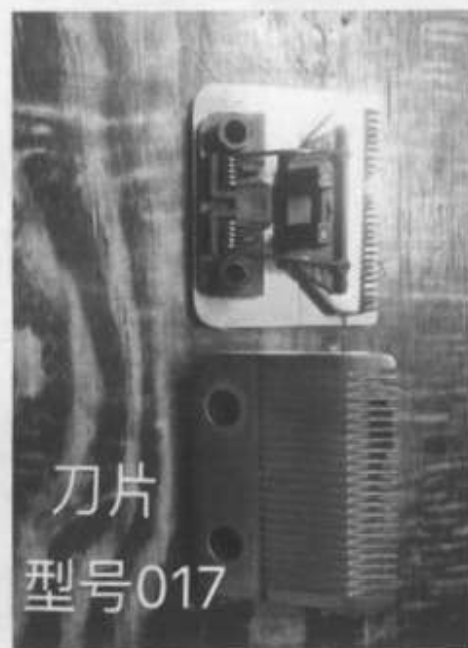

刀片
型号017




计时器
型号018



计电器
型号019



刀头小开关
型号020

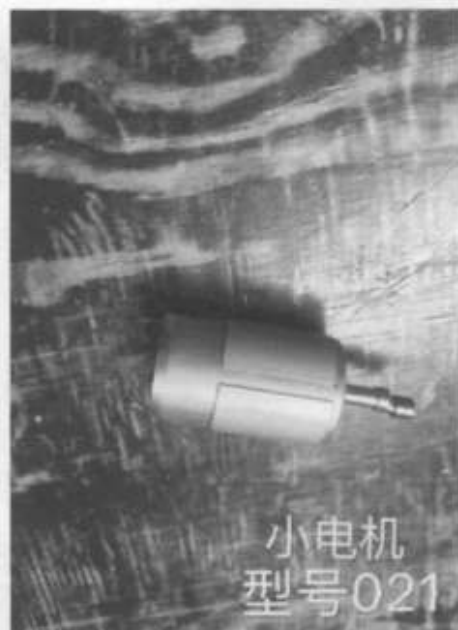

小电机
型号021



刀片
型号022



电源开关
型号023



刀头壳
型号024




挡风片
型号025




刀头二插头
型号026



保险座
型号027

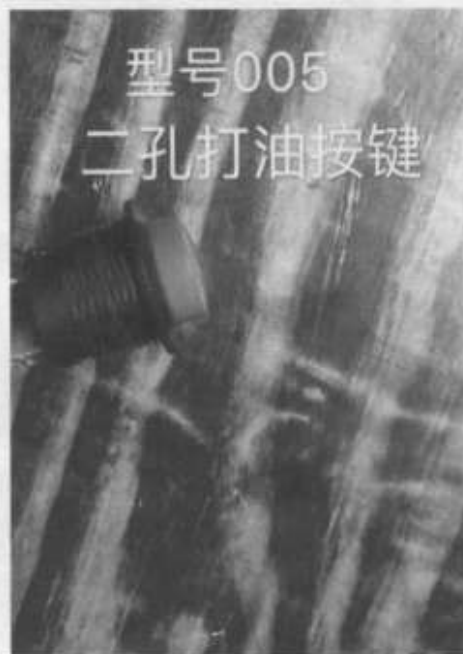

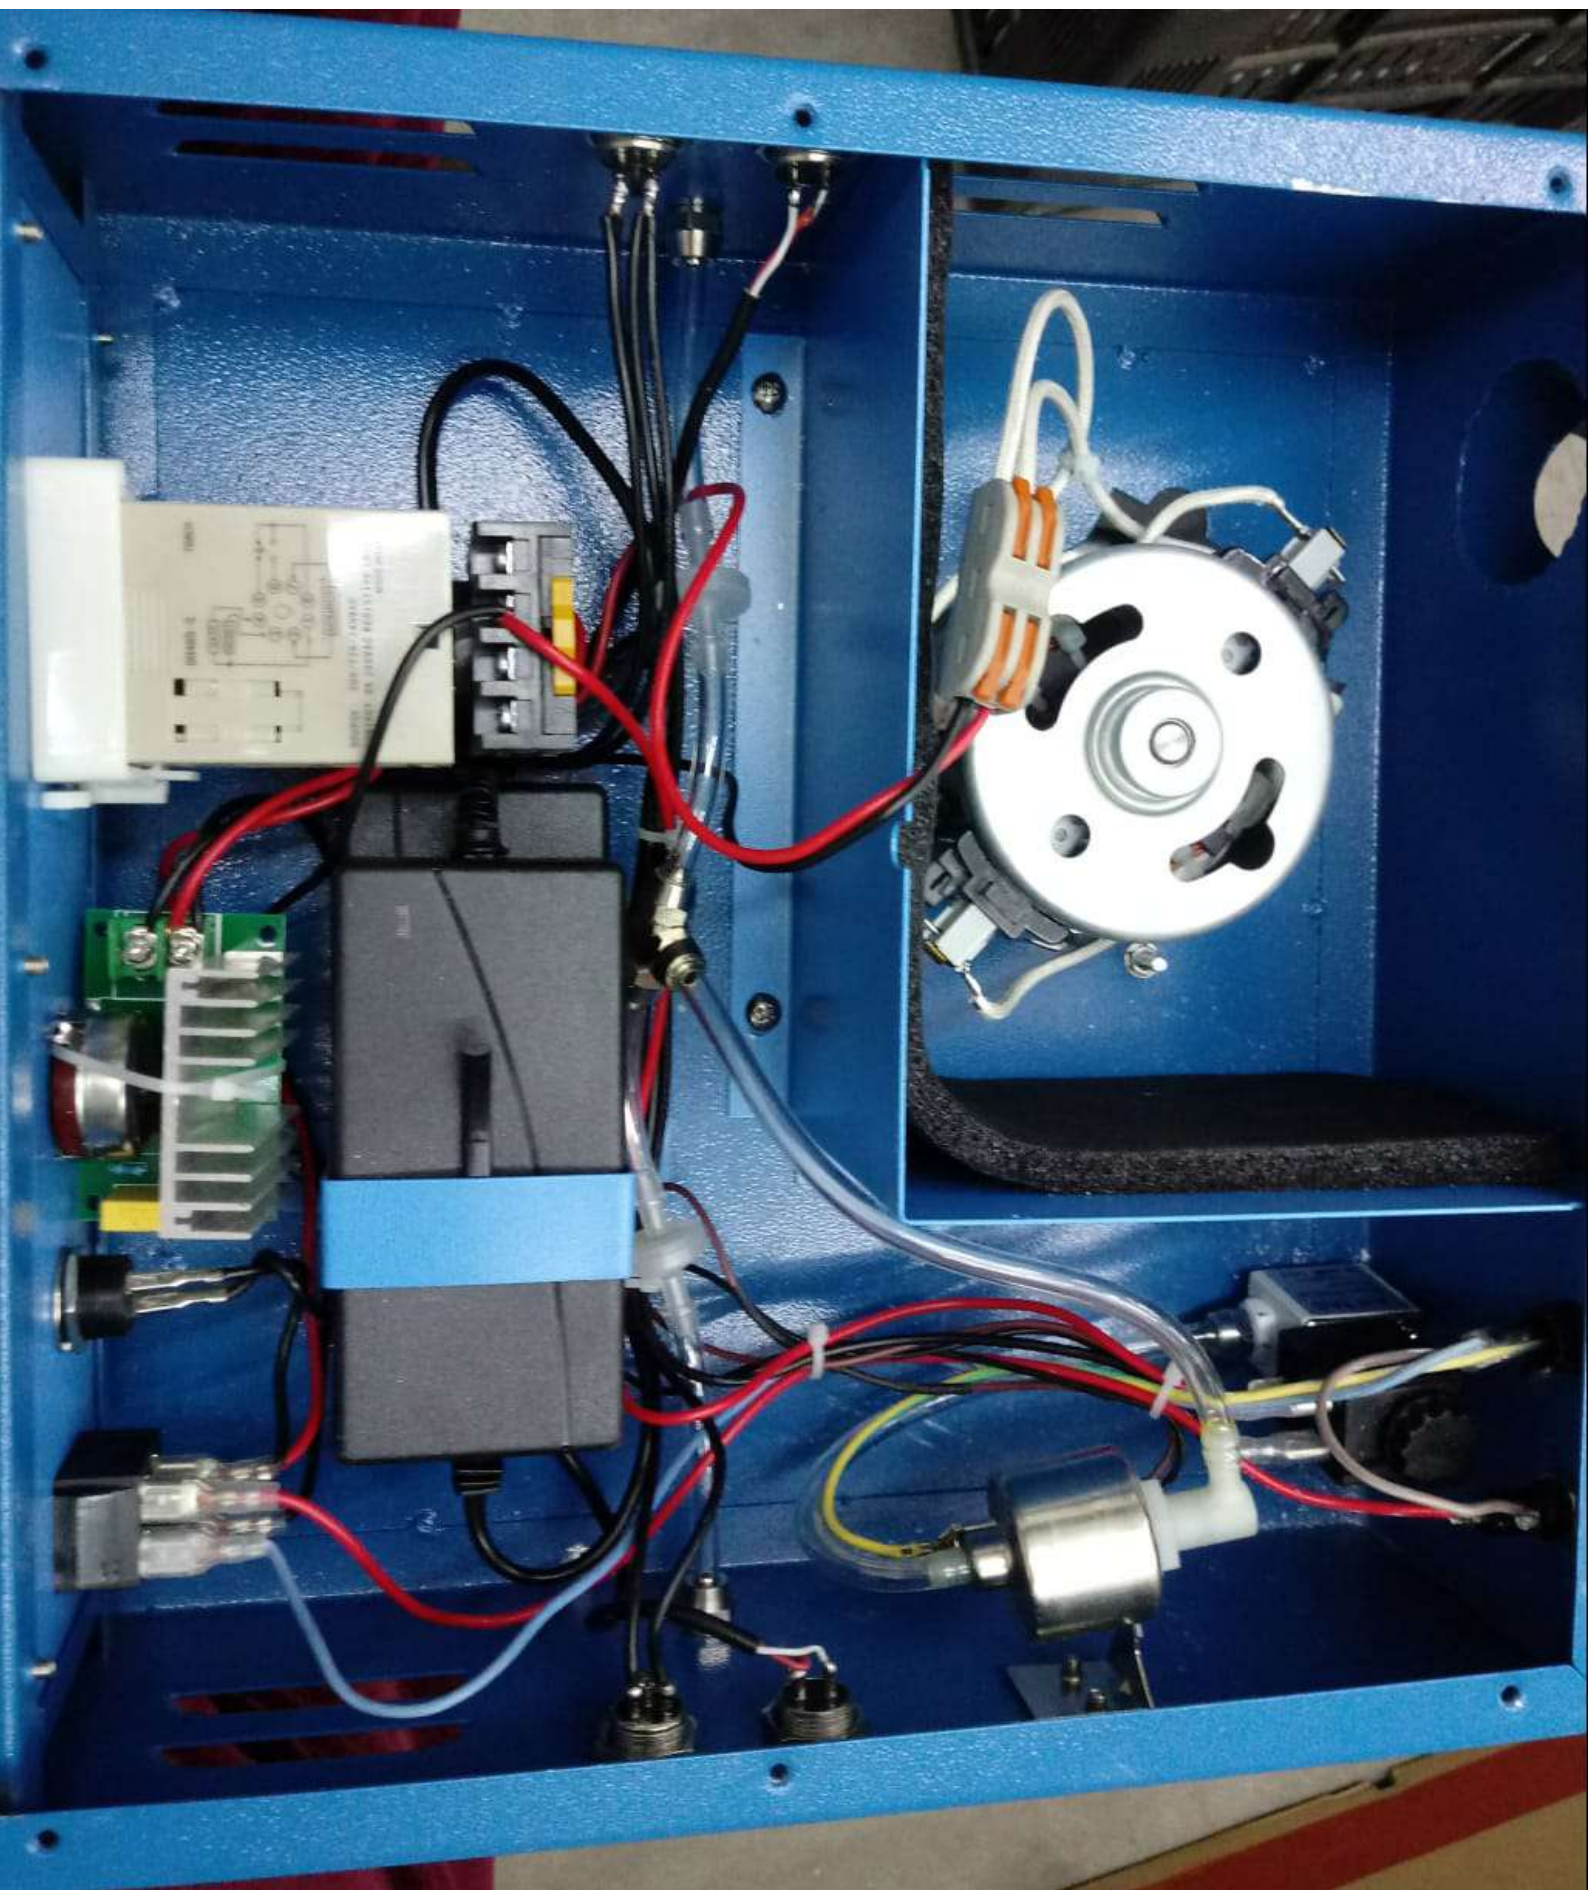

Manual de Instrução

Ideal para limpeza de fios em artigos de confecção tais como: Jeans, lingerie, malhas e outros

Facilidade e agilidade na operação (suga, corta e deposita os fios no reservatório

Instale os pentes (cortadores) sob o cano da máquina de corte de linha.

Adicione o óleo da máquina de costura ao copo fixado na parte de trás da máquina de corte de linha, favor insira o tubo no fundo do copo.

1. Por favor ajuste a sucção a uma velocidade baixa.
2. Posiciona para baixo o bocal para que o óleo flua com facilidade.
3. Pressione o botão de reabastecimento manual por alguns segundos até que haja lubrificação.
4. Reinicie a sucção e então você pode usar as máquinas normalmente

A velocidade da sucção desta máquina pode ser ajustada pelo botão de acordo com sua necessidade.

Esta máquina bombeia automaticamente o óleo em intervalos regulares de 30 minutos. Se você acha que é muito rápido ou muito lento, você pode ajustá-lo.

Esta máquina foi regulada antes de sair da fábrica, normalmente não precisa de ajustes. Em caso de tecido especial, você pode ir ajustando o equipamento até chegar ao ideal.

Nunca esqueça de fazer o abastecimento, pode causar problema no equipamento caso o reservatório estiver vazio

Se a máquina não funcionar por algum motivo verifique se não há acúmulo de resíduos (fios, linhas, etc)

Importado por:

Sun Special Com e Repres Eirelli

CNPJ.: 05.013.910/0001-22

Composição: Aço e PVC

Validade: Indeterminada

Sac.: 0800-6606000

Made in China

SSP-400/401

1. Double-headed work at the same time, while two workers in the same machine work, high efficiency, more than hand-cut line can be increased more than 3 times.


2. Do not sharpen, direct drive power.

3. t-shirt, underwear, embroidery, socks, gloves, shirts, leggings, pajamas, luggage, etc. For use in woven and knitted products such as denim, casual, handbags.

4. Microcomputer control, automatic oil supply, to ensure that the blade more durable.

5. High-tech integration, failure rate at the end, easy maintenance.

6. Adjustable wind, will not cut the p

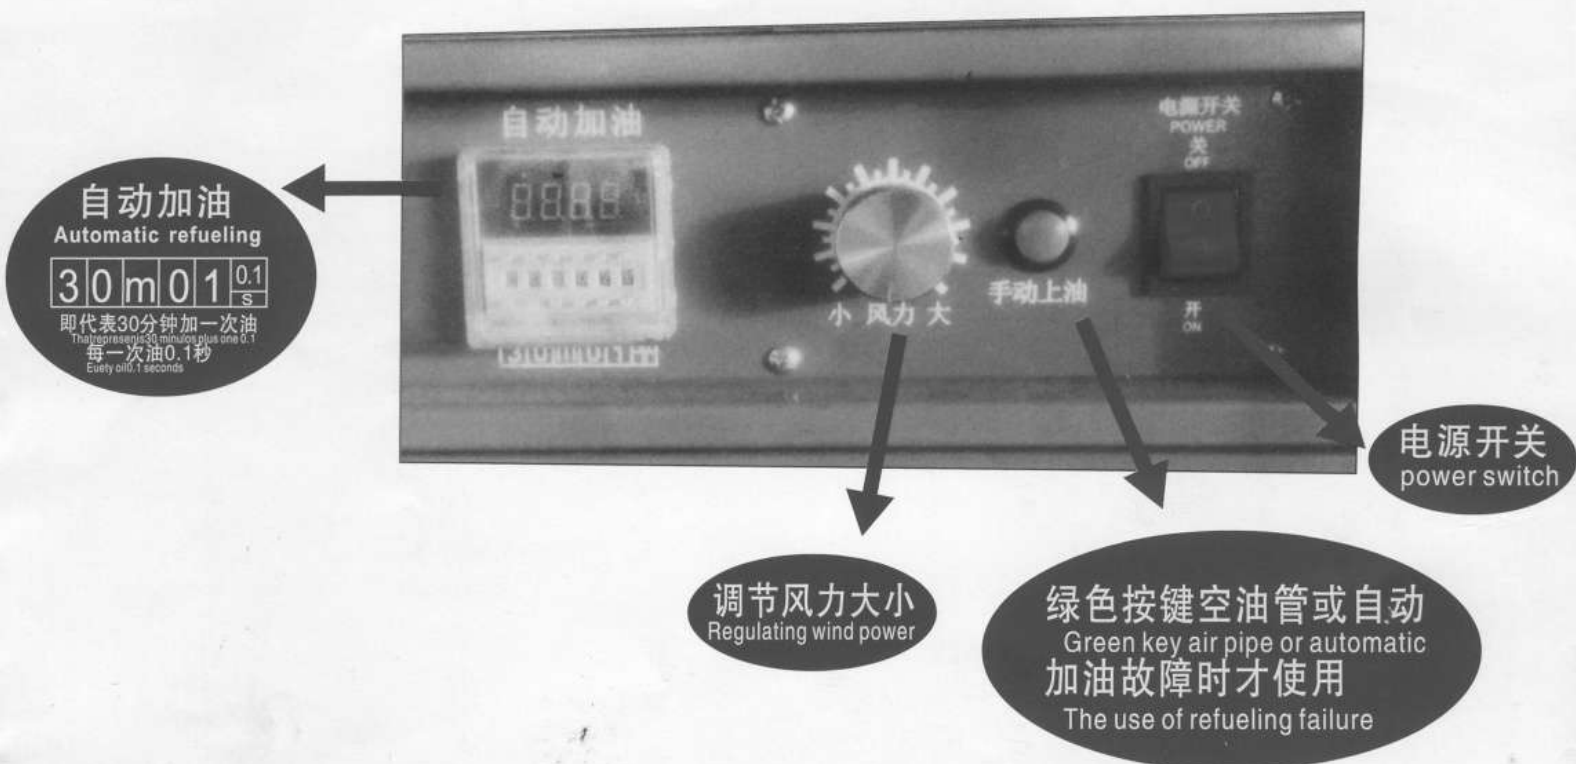

二、使用方法

Two, the use of methods

打开电源开关

Turn on the power switch

长按绿色按键抽油排空

Long press the green button to drain oil

根据产品布料调好适合的吸风力度

According to the product material to adjust the appropriate suction

使用时刀头口向前方线头处推动即可达到理想剪线效果(精确到0.01mm)

When using the knife head forward at the head drive can achieve the ideal effect of shear line (accurate to 0.01mm)

三、产品维护

Three, product maintenance

1、下班时将箱里的线清干净

1, after work, the box line clean

2、刀头(刀片)内线头清理干净

2. the head (blade) inside the head to clean up

注意: 装刀片不能压在挡风片上面, 否则会伤及衣服

Note: the blade can not be pressed on the top of the windshield, otherwise it will hurt the clothes

3、每天看一下油管是否供油。

3, every day to see whether the oil pipeline.

适用范围：

SCOPE OF APPLICATION:

适用于牛仔、休闲、手袋、童装、T恤、
Suitable for jeans, casual, handbags, children's wear, t-shirts,
内衣、绣花、箱包、梭织、针织、雪纺、
Underwear, embroidery, bags, woven, knitted, chiffon,
护外用品等等。

External supplies and so on.



使用说明：

INSTRUCTIONS:

1、每天清除刀头里的残余线头。

The 1 day, clear residual thread knife head.

(保持刀头通风以免堵塞)


(I keep the knife in the air so as not to stop.)

2、自动加油机型，长时间离开机器一定

2, automatic refueling models, along time to leave the machine

要关掉电源开关(以免漏油)。

To turn off the power switch (so as not to leak).

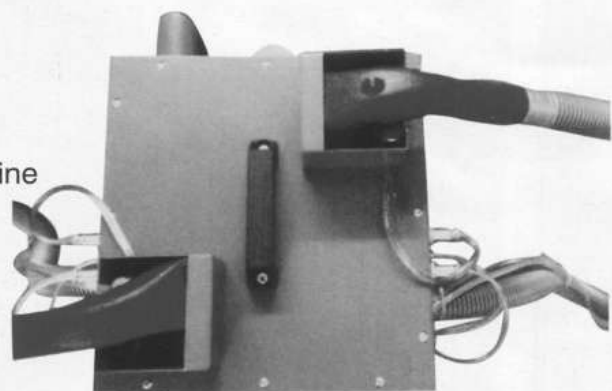

新机注意要素：

NEW MACHINE ATTENTION FACTOR:

1、把衣车油倒在剪线机后面的油杯里。

1, the sewing machine oil pour in the cup in front of the wire cutting machine

2、开关先开，把调风按键调到最小或关

2, the switch is open, the adjustment of the wind button to the minimum or off

了风按备用手动加油按钮。

The wind press the standby manual refueling button.

3、一直按手动加油按钮，把油抽上来，

3, always press the manual button, the oil pumping up,



看见刀头有油漏出来调风，调到合适的风力。

See the head of the knife has oil strain out to adjust the wind, to the appropriate wind

产品特点:

PRODUCT FEATURES:

- ◆ 工作效率高，比手工剪线可提高3倍以上；
The work efficiency is higher than the manual cut line can be increased by more than 3 times;
- ◆ 微电脑控制，自动输油，保证刀片润；
Microcomputer control, automatic oil delivery, to ensure that the blade run;
- ◆ 剪草除根线效果好，所剪头在0.1mm以下；
Jiancaochugen line effect is good, the hair cut again below 0.1mm;
- ◆ 高科技集成，故障率低，维护简单；
High tech integration, low failure rate, easy maintenance;
- ◆ 根据布料来调风，不会剪烂产品；
According to the cloth to adjust the wind, wind, will not cut rotten products;
- ◆ 可节省2-4个工人，剪线快又干净！
Can save 2-4 workers, cut the line fast and clean!

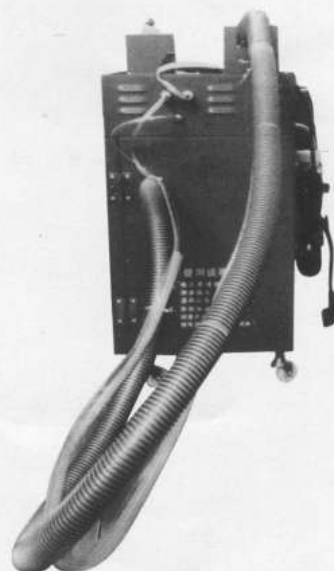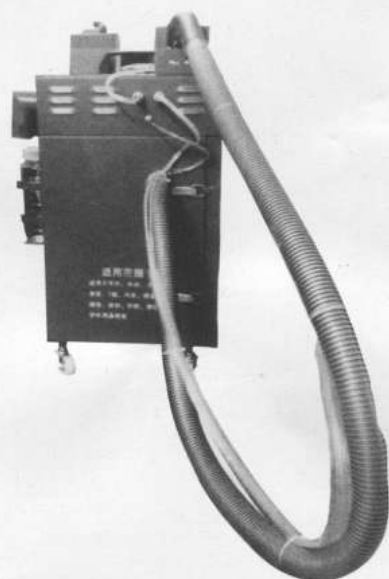

主要技术参数:


MAIN TECHNICAL PARAMETERS:

款式 Style	电压 Voltage	功率 Power	频率 Frequency	开发数 Number Of Development
单头 Single head	110V~220V	800W	50Hz~60Hz	3450RPM~60Hz
双头 Double	110V~220V	1200W	50Hz~60Hz	2900RPM~50Hz

以上产品如有技术、规格、颜色等变动，恕不另行通知，一切以供应商订货时为准)
The above products are subject to change without prior notice, such as technology, specification and color.


使用说明

INSTRUCTIONS

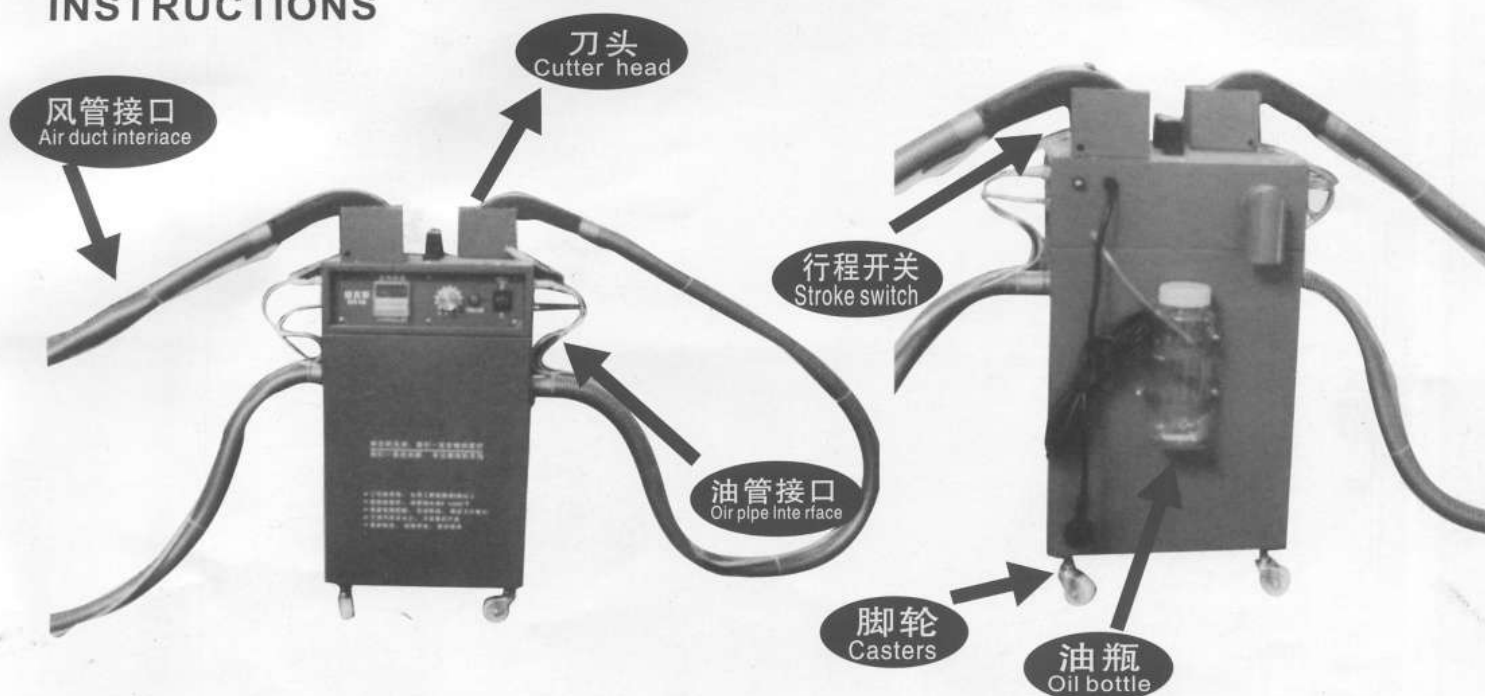

技术参考 Technical Reference

电压 Voltage	110V-220V
功率 Power	0W-1100W
Frequency	50Hz-60Hz
Revolutions	3450RPM-60Hz 2900RPM-50Hz

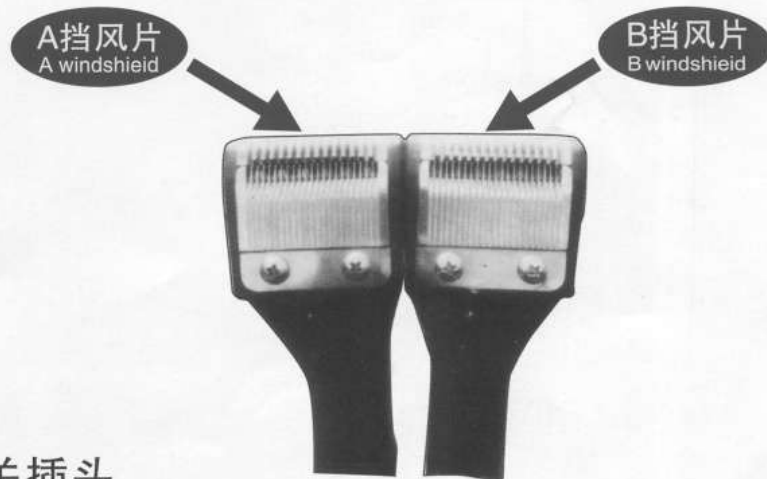

一、安装

First, installation

装上4个滑动轮子

Fitted with 4 sliding wheels

在顶部2处装上刀头架插上行程开关插头

The 2 is provided with a knife head inserted on the stroke switch plug at the top

将配备油(衣车油)倒入油瓶中

Will be equipped with oil (sewing machine oil) into the bottle

装上2个刀头与刀片

Fitted with 2 knife heads and blades

根据产品布料厚薄装上或换上合适挡风片

According to the product material loaded or put on the appropriate thickness of the windshield tablets

B挡风片剪厚布料

B cut thick cloth

A挡风片剪薄布料

A windshield cut thin cloth